

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Attorney Docket No.</td> <td>198574US2</td> </tr> <tr> <td>First Inventor or Application Identifier</td> <td>Hiroyuki KAWAMOTO, et al.</td> </tr> <tr> <td>Title</td> <td>IMAGE PROCESSING APPARATUS</td> </tr> </table>	Attorney Docket No.	198574US2	First Inventor or Application Identifier	Hiroyuki KAWAMOTO, et al.	Title	IMAGE PROCESSING APPARATUS
Attorney Docket No.	198574US2						
First Inventor or Application Identifier	Hiroyuki KAWAMOTO, et al.						
Title	IMAGE PROCESSING APPARATUS						

<p style="text-align: center;">APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents</p> <p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g. PTO/SB/17) (Submit an original and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification Total Sheets 54</p> <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) Total Sheets 17 Formals</p> <p><input type="checkbox"/> Oath or Declaration Total Pages </p> <p style="margin-left: 20px;">a. <input type="checkbox"/> Newly executed (original or copy)</p> <p style="margin-left: 40px;">i. <input type="checkbox"/> DELETION OF INVENTOR(S) <small>Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. § 1.63(d)(2) and 1.329.</small></p> <p>5. <input type="checkbox"/> CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)</p> <p>6. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)</p> <p style="margin-left: 20px;">a. <input type="checkbox"/> Computer Readable Form (CRF)</p> <p style="margin-left: 20px;">b. Specification or Sequence Listing on:</p> <p style="margin-left: 40px;">i. <input type="checkbox"/> CD-ROM or CD-R (2 copies); or</p> <p style="margin-left: 40px;">ii. <input type="checkbox"/> Paper</p> <p style="margin-left: 20px;">c. <input type="checkbox"/> Statements verifying identity of above copies</p>	<p>ADDRESS TO: Assistant Commissioner for Patents, Box Patent Application Washington, DC 20231</p> <p style="text-align: center;">ACCOMPANYING APPLICATION PARTS</p> <p>7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))</p> <p>8. <input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76</p> <p>9. <input type="checkbox"/> Statement of Invention (when there is an assignee) <input type="checkbox"/> Power of Attorney</p> <p>10. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>11. <input type="checkbox"/> Information Disclosure Statement <input type="checkbox"/> Copies of IDS Citations (IDS)/PTO-1449</p> <p>12. <input type="checkbox"/> Preliminary Amendment</p> <p>13. <input checked="" type="checkbox"/> White Advance Serial No. Postcard</p> <p>14. <input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27</p> <p>15. <input checked="" type="checkbox"/> Other: Certified Copy of Priority Document (1), Notice of Priority, List of Inventors' Names and Addresses</p>
--	--

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application no.: _____

Prior application information: Examiner: _____ Group Art Unit: _____


For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.


17. Amend the specification by inserting before the first line the sentence:

☐ This application is a ☐ Continuation ☐ Division ☐ Continuation-in-part (CIP) of application Serial No. _____ Filed on _____

☐ This application claims priority of provisional application Serial No. _____ Filed _____

18. CORRESPONDENCE ADDRESS


22850
 (703) 413-3000
 FACSIMILE: (703) 413-2220

Name: Marvin J. Spivak	Registration No.: 24,913
Signature: 	Date: 10/23/00
Name: C. Irvin McClelland Registration Number 21,124	Registration No.: _____

Docket No. 198574US2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

INVENTOR(S) Hiroyuki KAWAMOTO, et al.

SERIAL NO: New Application

FILING DATE: Herewith

FOR: IMAGE PROCESSING APPARATUS

FEE TRANSMITTAL

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

FOR	NUMBER FILED	NUMBER EXTRA	RATE	CALCULATIONS
TOTAL CLAIMS	12 - 20 =	0	× \$18 =	\$0.00
INDEPENDENT CLAIMS	3 - 3 =	0	× \$80 =	\$0.00
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS (If applicable)			+ \$270 =	\$0.00
<input checked="" type="checkbox"/> LATE FILING OF DECLARATION			+ \$130 =	\$130.00
BASIC FEE				\$710.00
TOTAL OF ABOVE CALCULATIONS				\$840.00
<input type="checkbox"/> REDUCTION BY 50% FOR FILING BY SMALL ENTITY				\$0.00
<input type="checkbox"/> FILING IN NON-ENGLISH LANGUAGE			+ \$130 =	\$0.00
<input type="checkbox"/> RECORDATION OF ASSIGNMENT			+ \$40 =	\$0.00
TOTAL				\$840.00

- ☐ Please charge Deposit Account No. 15-0030 in the amount of _____ A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$840.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required for the papers being filed herewith and for which no check is enclosed herewith, or credit any overpayment to Deposit Account No. 15-0030. A duplicate copy of this sheet is enclosed.

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.

Date: 10/23/00



22850

Tel. (703) 413-3000
Fax. (703) 413-2220
(OSMMN 10/00)



Marvin J. Spivak
Registration No. 24,913
C. Irvin McClelland
Registration Number 21,124

IMAGE PROCESSING APPARATUS

FIELD OF THE INVENTION

The present invention in general relates to an image
5 processing apparatus which performs image processing with
respect to digital image data. More specifically, this
invention relates to an image processing apparatus which
performs image processing with respect to image data in a
digital compound machine which compounds functions of
10 copying machine, fax machine, printer, scanner etc.

BACKGROUND OF THE INVENTION

Analog image processing apparatuses were popular a few
years ago. However, due to recent improvement of technology
15 and demands for displaying color images, digital copying
machines are widely used along with the conventional analog
image processing apparatus.

Furthermore, copying machines dedicated for copying
documents, facsimile machines dedicated for sending and
20 receiving facsimile, scanners dedicated for scanning
documents, printers dedicated for printing the documents
were also know. However, recently, so-called digital
compound machines have come into market. These digital
compound machines have the functions of a copying machine,
25 a facsimile machine, a scanner, a printer etc.

Fig. 18 is a block diagram that shows a hardware configuration of a conventional digital compound machine.

This digital compound machine has realizes respective functions by connecting a portion constituting a copying machine (a copying machine portion) formed of a digital read unit 2201 for reading image data, an image processing unit 2202 for processing the read image data, a video control section 2203 for performing various controls with respect to the image data, a series of each component in a write unit 2204 for outputting the processed image data onto a recording medium, a memory control unit 2205 for controlling holding of the image data and a memory module 2206 for holding the image data with units such as a facsimile control unit 2212 for additionally controlling facsimile transfer via a mother board 2211, a printer control unit 2213 for performing input control of image data transmitted from an externally connected personal computer, and a scanner control unit 2214 for performing input/output control of image data when being used as a scanner.

Accordingly, as for the copying machine portion for realizing a function as a copying machine, a series of operations of respective components of the read unit 2201, image processing unit 2202, video control unit 2203 and write unit 2204 are controlled by a system controller 2207, RAM 2208 and ROM 2209, and respective units of the facsimile

control unit 2212, printer control unit 2213 and scanner control unit 2214 utilize a part of the series of operations established by the copying machine, to thereby realize functions of respective units.

5 In other words, the functions of the digital compound machine are realized by adding on the facsimile control unit 2212, printer control unit 2213 and scanner control unit 2214 to the copying machine portion which has been established as one system comprising the above-described series of
10 components. This is based on a background that the processing speed is given priority (speed-up of the processing is contemplated) by constituting the above-described series of components of hardware such as ASIC (Application Specific Integrated Circuit).

15 Particularly, in Japanese Unexamined Patent Publication No. H5-20283, "Parallel data processing apparatus", there is disclosed a technique related to a parallel data processing apparatus including a SIMD (Single Instruction Multiple Data stream) type parallel data
20 processing apparatus and a MIMD (Multiple Instruction Multiple Data stream) type parallel data processing apparatus.

According to this parallel data processing apparatus, improvement of the processing speed is contemplated by
25 performing the SIMD type parallel data processing with

regard to regular processing (shading correction processing,
scanner γ -correction processing, or the like), and
performing the MIMD type parallel data processing with
regard to irregular processing (error diffusion processing),
5 via a switching control.

Therefore, it is possible to contemplate speed-up of
the image processing by applying this parallel data
processing apparatus to the read unit 2201, facsimile
control unit 2212, printer control unit 2213, scanner
10 control unit 2214 and image processing unit 2202.

However, in the conventional digital compound machine,
since the copying machine portion has been established as
one system, the respective units connected to the copying
machine portion, such as the facsimile control unit 2212,
15 the printer control unit 2213 and the scanner control unit
2214 must be built up as a system, respectively independently
of the copying machine portion, in order to realize
respective functions.

This means that it is necessary to constitute
20 respective units as well as the image processing unit 2202
so as to include ASIC (not shown in Fig. 18) required for
realizing the image processing function, respectively,
causing a problem in that resources are not effectively
utilized.

25 Moreover, even if overlapping of respective units is

eliminated, and an efficient digital compound machine is formed so that image processing is performed by only the image processing unit, there is still a problem as described below. Consider, for example, a case where a read unit or a write
5 unit of 400 dpi is to be upgraded to the one of 600 dpi. Improvement of the overall function of the apparatus cannot be easily effectuated only by replacing the unit under consideration.

Specifically, since the whole system is built so as
10 to read/written at 400 dpi, it is necessary to redesign the image processing processor in the unit so that read/write at 600 dpi can be performed.

This is because when image processing (error diffusion processing or the like) which is required to be performed
15 referring to pixels around the target pixel is performed, the maximum pixel that can be handled by one processor is limited by a line memory in the image processing processor, while there is a demand for high-speed image processing using the SIMD type processor with parallel calculation.

20 Accordingly, there is a problem in that while most resources within the image processing processor are common, it is necessary to modify a chip due to a reason that the size of the internal memory capacity is relatively insufficient, and hence the development efficiency
25 decreases, and the image processing processor cannot be

effectively utilized.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide
5 an image processing apparatus which can perform high-speed
image processing by effectively utilizing an image
processing processor, even in a case where the memory
capacity of the image processing unit (image processing
processor) is relatively insufficient, in order to solve the
10 above-described problems in the related art.

In the image processing apparatus according to one
aspect of this invention, a control unit is provided which
controls the read and/or write timing of an input I/F memory
and an output I/F memory. Accordingly, overlapped pixels
15 can be processed by the SIMD type processor.

In the image processing apparatus according to another
aspect of this invention, a control unit is provided which
controls read and/or write timing of an input I/F memory and
an output I/F memory. Accordingly, overlapped pixels can
20 be processed at a higher speed by the SIMD type processor.

In the image processing apparatus according to still
another aspect of this invention, a control unit is provided
which controls write and/or read speed with respect an input
I/F memory, and write and/or read timing with respect the
25 input I/F memory based on the speed and the capacity of the

input I/F memory, and/or the write and/or read speed with respect an output I/F memory, and the write and/or read timing with respect the output I/F memory based on the speed and the capacity of the output I/F memory. Accordingly, the
5 overlapped pixels can be most efficiently processed by the SIMD type processor, while taking into consideration the capacity of the input I/F memory and the output I/F memory.

Other objects and features of this invention will become apparent from the following description with
10 reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram which functionally shows the construction of an image processing apparatus according to
15 a first embodiment.

Fig. 2 is a block diagram which shows an example of the hardware configuration of an image processing apparatus according to the first embodiment.

Fig. 3 is a block diagram which shows the outline of
20 the processing of an image processing processor in an image processing apparatus according to the first embodiment.

Fig. 4 is a block diagram which shows the internal construction of an image processing processor in an image processing apparatus according to the first embodiment.

25 Fig. 5 is a schematic block diagram which shows the

internal construction of an image processing processor in an image processing apparatus according to the first embodiment.

Fig. 6 is a schematic block diagram which shows a part
5 of the schematic block diagram of the image processing processor shown in Fig. 5.

Fig. 7 is a timing chart which shows the sequence of processing performed by IN_FIFO, SIMD type processor and OUT_FIFO in the first embodiment.

Fig. 8 is a block diagram which shows the outline of processing of an image data control section in the image processing apparatus according to the first embodiment.

Fig. 9 is a block diagram which shows the outline of processing of video data of the image processing apparatus
15 according to the first embodiment.

Fig. 10 is a block diagram which shows the outline of processing of an image memory access control section in the image processing apparatus according to the first embodiment.

Fig. 11 is a diagram which shows the outline of a scanner (an example of a spatial filter) in the image processing apparatus according to the first embodiment.

Fig. 12 is a diagram which shows the outline of shading correction of the image processing apparatus according to
25 the first embodiment.

Fig. 13 is a diagram which shows the outline of shading data in the image processing apparatus according to the first embodiment.

Fig. 14 is a diagram which shows the schematic construction of a SIMD type processor used the image processing apparatus according to the first embodiment.

Fig. 15 is a timing chart which shows the sequence of processing performed by IN_FIFO, SIMD type processor and OUT_FIFO in a second embodiment.

Fig. 16 is a timing chart which shows the sequence of processing performed by IN_FIFO, SIMD type processor and OUT_FIFO in a third embodiment.

Fig. 17 is a timing chart which shows the sequence of processing performed by IN_FIFO, SIMD type processor and OUT_FIFO in a fourth embodiment.

Fig. 18 is a block diagram showing the hardware configuration of a conventional digital compound machine.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Five preferred embodiments of the image processing apparatus according to the present invention will now be described in detail, with reference to the accompanying drawings.

At first, the principle of the image processing apparatus according to a first embodiment will be described.

Fig. 1 is a block diagram functionally showing the construction of the image processing apparatus according to the first embodiment of the present invention. This image processing apparatus has five units as explained below.

5 That is, this image processing apparatus has an image data control unit 100, an image read unit 101 for reading image data, an image memory control unit 102 for controlling an image memory for storing images to perform write/read of image data, an image processing unit 103 for subjecting the
10 image data to image processing such as processing/editing, and an image write unit 104 for writing the image data on a transfer paper or the like.

Each of the above-described unit is connected to the image data control unit 100. That is, the image read unit
15 101, the image memory control unit 102, the image processing unit 103 and the image write unit 104 are connected to the image data control unit 100.

The image data control unit 100 performs, for example, following processing.

20 (1) Data compression processing (primary compression) for improving the bus transfer efficiency of the data;

 (2) Transfer processing of the primary compression data to the image data;

 (3) Image synthesis processing (it is possible to
25 synthesize image data from a plurality of units, and also

including synthesis on the data bus);

(4) Image shift processing (image shift in the horizontal scanning direction and vertical scanning direction);

(5) Image area extension processing (it is possible to
5 extend the image area to the surroundings by an optional amount);

(6) Image variable power processing (for example, fixed variable power of 50% or 200%);

(7) Parallel bus interface processing;

10 (8) Serial bus interface processing (interface with a process controller 211 described later);

(9) Format conversion processing of parallel data and serial data;

(10) Interface processing with the image read unit 101;
15 and

(11) Interface processing with the image processing unit 103.

The image read unit 101 performs, for example, following processing.

20 (1) Processing for reading light reflected on the original document by means of an optical system;

(2) Conversion processing to an electric signal by means of a CCD (Charge Couple Device);

(3) Digitalization processing by means of an A/D converter;

25 (4) Shading correction processing (processing for

correcting illuminance distribution nonuniformity of a light source); and

- (5) Scanner γ -correction processing (processing for correcting concentration characteristic of the read system).

The image memory control unit 102 performs, for example, following processing.

- (1) Interface control processing with a system controller;
- (2) Parallel bus control processing (interface control processing with a parallel bus);
- (3) Network control processing;
- (4) Serial bus control processing (control processing of a plurality of external serial ports);
- (5) Internal bus interface control processing (command control processing with an operation section);
- (6) Local bus control processing (access control processing of ROM, RAM, font data for activating the system controller);
- (7) Operation control processing of a memory module (write/read control processing or the like of the memory module);
- (8) Access control processing to the memory module (processing for adjusting memory access requests from a plurality of units);
- (9) Data compression/expansion processing (processing for

reducing data quantity for effectively utilizing a memory);
and

- (10) Image editing processing (data clear of the memory area, rotation processing of the image data, image synthesis processing on the memory or the like).

The image processing unit 103 performs, for example, following processing.

- (1) Shading correction processing (processing for correcting illuminance distribution nonuniformity of a light source);

(2) Scanner γ -correction processing (processing for correcting concentration characteristic of the readout data).

- (3) MTF correction processing;

- (4) Smoothing processing;

(5) Optional variable power processing in the horizontal scanning direction;

(6) Concentration conversion (γ -conversion processing: corresponding to the concentration notch);

- (7) Simple multi-valued processing;

(8) Simple binarization processing;

(9) Error diffusion processing;

(10) Dither processing;

- (11) Dot arrangement phase control processing (dots leaning to the right, dots leaning to the left);

- (12) Isolated point removal processing;
- (13) Image area separation processing (color judgment, attribute judgment, adaptation processing); and
- (14) Density conversion processing.

5 The image write unit 104 performs, for example, following processing.

- (1) Edge smoothing processing (jaggie correction processing);
- (2) Correction processing for rearrangement of dots;
- 10 (3) Pulse control processing of an image signal; and
- (4) Format conversion processing of parallel data and serial data.

 The hardware configuration of the image processing apparatus according to the first embodiment will now be
15 described. Fig. 2 is a block diagram showing one example of the hardware configuration of the image processing apparatus according to this embodiment.

 This image processing apparatus according to this embodiment comprises a read unit 201, a sensor board unit
20 202, an image data control section 203, an image processing processor 204, a video data control section 205, and an imaging unit (engine) 206. The image processing apparatus according to this embodiment also comprises, via a serial bus 210, a process controller 211, a RAM 212 and a ROM 213.

25 Moreover, the image processing apparatus according to

this embodiment comprises, via a parallel bus 220, an image memory access control section 221, a memory module 222, a facsimile control unit 224, and a system controller 231, RAM 232, ROM 233 and an operation panel 234 connected to the image
5 memory access control section 221.

A relation between the components shown in Fig. 2 and those shown in Fig. 1 is as follows. That is, the function of the image read unit 101 shown in Fig. 1 is realized by the read unit 201 and the sensor board unit 202. The function
10 of the image data control unit 100 is realized by the image data control section 203. The function of the image processing unit 103 is realized by the image processing processor 204.

The image write unit 104 is effectuated by the video
15 data control section 205 and the imaging unit (engine) 206. Also the image memory control unit is effectuated by the image memory access control section 221 and the memory module 222.

The contents of each component will now be described. The read unit 201 for optically reading an original document
20 comprises a lamp, a mirror and a lens, and the reflected light of the lamp irradiation with respect to the original document is gathered into a photodetector by means of the mirror and the lens.

The photodetector, for example, CCD is mounted on the
25 sensor board unit 202, and the image data converted to

electric signals in the CCD is converted to digital signals,
and then output (transmitted) from the sensor board unit 202.

The image data output (transmitted) from the sensor
board unit 202 is input (received) to the image data control
5 section 203. The transmission of image data between the
functional device (processing unit) and the data bus is
controlled by the image data control section 203.

The image data control section 203 performs data
transfer between the sensor board unit 202, the parallel bus
10 220 and the image processing processor 204 with respect to
the image data, and communication between the process
controller 211 the image data and the system controller 207
which performs overall control of the image processing
apparatus. Moreover, the RAM 212 is used as a work area of
15 the process controller 211 and the ROM 213 stores boot program
or the like of the process controller 211.

The image data output (transmitted) from the sensor
board unit 202 is transferred (transmitted) via the image
data control section 203 to the image processing processor
20 204, to correct signal deterioration (signal deterioration
of the scanner system) accompanying quantization with
respect to the optical system and the digital signal, and
is again output (transmitted) to the image data control
section 203.

25 The image memory access control section 221 controls

write and read of the image data with respect to the memory module, and also controls the operation of each component connected to the system parallel bus 220. Moreover, the RAM 232 is used as a work area of the system controller 231 and
5 the ROM 233 stores boot program or the like of the system controller 211.

The operation panel 234 inputs processing to be performed by the image processing apparatus, for example, types of processing (copying, facsimile transmission, image
10 read, printing or the like) and number of pages to be processed. Thereby, the image data control information can be input. The contents of the facsimile control unit 224 will be described later.

Thereafter, there are a job for accumulating the read
15 out image data in the memory module 222 for reuse, and a job for not accumulating the image data in the memory module 222, and the respective cases will be described. As an example of the case to be accumulated in the memory module 222, there is a method wherein when one document is copied in a plurality
20 of numbers, the read unit 201 is operated only once, and the image data read by the read unit 201 is accumulated in the memory module 222, to read the accumulated image data in a plurality of times.

As an example of not using the memory module 222, when
25 one document is copied only once, since the read out image

data is directly reproduced, the access by the image memory access control section 221 to the memory module 222 is not necessary.

At first, when the memory module 222 is not used, the
5 data transferred from the image processing processor 204 to the image data control section 204 is returned again from the image data control section 203 to the image processing processor 204. In the image processing processor 203, an
10 image quality processing by means of the CCD in the sensor board unit 202 is performed for converting the luminance data to the area gradation.

The image data after the image quality processing is transferred from the image processing processor 204 to the video data control section 205. The signal converted to the
15 area gradation is subjected to post processing with regard to the dot arrangement and a pulse control for reproducing the dots, and thereafter, the reproduced image is formed on a transfer paper in the imaging unit 206.

Next, additional processing at the time of readout of
20 the image accumulated in the memory module 222, for example, the image data flow will be described for the case where rotation of the image direction, synthesis of the image or the like is performed. The image data transferred from the image processing processor 204 to the image data control
25 section 203 is transmitted from the image data control

section 203 to the image memory access control section 221,
via the parallel bus 220.

Here, access control of the image data and the memory
module 222 based on the control of the system controller 231,
5 development of the printing data by means of an external PC
(personal computer) 223, and compression/expansion of image
data for effectively utilizing the memory module 222 are
performed.

The image data transmitted to the image memory access
10 control section 221 is accumulated in the memory module 222
after data compression, and the accumulated image data is
read out according to need. The read out image data is
expanded, to return the data to the original image data, and
returned from the image memory access control section 221
15 to the image data control section 203 via the parallel bus
220.

After the transfer of the image data from the image
data control section 203 to the image processing processor
204, the image data is subjected to image quality processing
20 and pulse control in the video data control section 205, to
thereby form a reproduced image on a transfer paper in the
imaging unit 206.

In the image data flow, the function of the digital
compound machine is effectuated by bus control in the
25 parallel bus 220 and the image data control section 203. The

facsimile transmission function is to perform image processing with respect to the read out image data in the image processing processor 204, and transfer the image data to the facsimile control unit 224 via the image data control section 203 and the parallel bus 220. The image data is subjected to the data conversion to the communication network in the facsimile control unit 224, and transmitted as facsimile data to the public line (PN) 225.

On the other hand, with regard to the received facsimile data, the line data from the public line (PN) 225 is converted to the image data in the facsimile control unit 224, and is transferred to the image processing processor 204 via the parallel bus 220 and the image data control section 203. In this case, special image quality processing is not performed, and dot rearrangement and pulse control are performed in the video data control section 205 with respect to the image data, and a reproduced image is formed on a transfer paper in the imaging unit 206.

In a situation where a plurality of jobs, for example, the copying function, the facsimile transmission function, the printer output function operate in parallel, allocation of the right of use of the read unit 201, the imaging unit 206 and the parallel bus 220 to the plurality of jobs is controlled in the system controller 231 and the process controller 211.

The process controller 211 controls the image data flow, and the system controller 231 controls the entire system, and manages activation of each resource. Moreover, the function selection of the digital compound machine is input
5 by the operation panel (operation section) 234, to thereby set up the processing contents such as copying function, facsimile function or the like.

The system controller 231 and the process controller 211 communicate with each other via the image data control
10 section 203 and the serial bus 210. Specifically, by performing data format conversion for the data interface between the parallel bus 220 and the serial bus 210 in the image data control section 203, the communication between the system controller 231 and the process controller 211 is
15 performed.

The outline of the processing in the image processing processor 204 constituting the image processing unit 103 will now be described. Fig. 3 is a block diagram showing one example of the processing of the image processing
20 processor 204 in the image processing apparatus according to the first embodiment.

The image processing processor 204 comprises a first input I/F 501, a scanner image processing section 502, a first output I/F 503, a second input I/F 504, an image quality
25 processing section, and a second output I/F 506.

The read out image data is transmitted from the first input interface (I/F) 501 in the image processing processor 204 to the scanner image processing section 502 via the sensor board unit 202 and the image data control section 203.

5 The object thereof is to correct the deterioration in the read out image data, and specifically, shading correction, scanner γ -correction, MTF correction or the like is performed. Though not a correction processing, variable power processing of enlargement/reduction may be performed. When the correction processing with respect to
10 the read out image data has been completed, the image data is transferred to the image data control section 203 via the first output interface (I/F) 503.

At the time of output onto the transfer paper, the image
15 data from the image data control section 203 is received from the second input I/F 504, and subjects the image data to the area gradation processing in the image quality processing section 505. The image data, after having been subjected to the image quality processing, is output to the video data
20 control section 205 or to the image data control section 203 via the second output I/F 506.

The area gradation processing in the image quality processing section 505 includes concentration conversion processing, dither processing, error diffusion processing
25 and the like, and the main processing thereof is area

approximation of the gradation information. Once the image data processed in the scanner image processing section 502 is accumulated in the memory module 222, various reproduced images can be ensured by changing the image quality processing by the image quality processing section 505.

For example, the mood of the reproduced image can be easily changed by waving (changing) concentration of the reproduced image or by changing the number of lines in the dither matrix. At this time, it is not necessary to re-read the image from the read unit 201 every time the processing is changed, and different processing can be rapidly performed for many times with respect to the same image data, by reading out the image data accumulated in the memory module 222.

The processing contents in the scanner image processing section 502 and the image quality processing section 505 can be programmably changed. Switching of the processing, change of the processing procedure or the like is controlled in the control section 507 via the serial I/F 508. Moreover, the control section 507 controls the write enable signal (timing of write enable), read enable signal (timing of read enable), the write clock rate and read clock rate of the FIFO memory described later.

In Fig. 3, for convenience' sake of explanation, the scanner image processing section 502 and the image quality

processing section 505 are represented by separate blocks, but the actual data is processed by connecting a plurality of units comprising the SIMD type processor and the FIFO memory having the similar structure. Hence, it does not mean
5 that the plurality of connected units have to be provided separately and independently in the scanner image processing section 502 and the image quality processing section.

Next, internal construction of the image processing processor 204 will be explained. Fig. 4 is a block diagram
10 showing the internal construction of the image processing processor 204 in the image processing apparatus according to this embodiment, and Fig. 5 is a schematic block diagram. The image processing processor is related to the data input/output with external equipment, and comprises a
15 plurality of input/output ports (image ports) 601, and can optionally set the input and output of the data, respectively.

Moreover, the image processing processor comprises a bus switch/local memory group 602 therein for the connection
20 with the input/output ports 601, and controls the memory area to be used and the route of the data path in the memory control section 603. For the input data and data to be output, the bus switch/local memory group 602 are allocated as a buffer memory for respectively storing these data and controlling
25 I/F with the external equipment.

The image data stored in the bus switch/local memory group 602 undergoes various processing in a processor array section 604, and the output result (processed image data) is again stored in the bus switch/local memory group 602.

5 The processing procedure of the processor, parameter for the processing or the like is transferred between program RAM 605 and data RAM 606.

The contents of the program RAM 605 and data RAM 606 are downloaded from the process controller 211 to a host

10 buffer 607 via a serial I/F 608. The process controller 211 also reads the contents of the data RAM 606 and monitors the passage of the processing.

If the contents of the processing are changed, or the processing method is changed, contents in the program RAM

15 605 and data RAM 606 to which the processor array section 604 refers are updated to correspond to the change.

Fig. 6 is a schematic block diagram showing a part of the schematic block diagram of the image processing processor shown in Fig. 5. In Fig. 6, the local memory group

20 in Fig. 5 is denoted as IN_FIFO with respect to the data input side, and as OUT_FIFO with respect to the data output side. Also, the processor array section 604 is represented as a set of the SIMD type processor.

As is clearly seen from the figure, the image data is

25 processed by connecting a plurality of units comprising the

SIMD type processor and the FIFO memory having the similar structure. However, the term, "unit" used herein does not mean that the unit is physically united, but does mean that it is used as a set in the passage of data processing.

5 Having a plurality of units enables such an operation that the image data having a length determined by setting is input from the input/output port 601, and is subjected to a desired image processing based on the control of the program, and the data after processing is output from the
10 input/output port 601.

 According to this embodiment, it is assumed that the pixel length that the SIMD type processor can read at a time is 8000 pixels having a length exceeding 7020 pixels which is the horizontal scanning length when A3 document is read
15 at a pixel density of 600 dpi. Accordingly, when reading at 600 dpi, in principle, one SIMD type processor can perform the image processing.

 The image processing apparatus according to this embodiment is constructed such that data having the
20 horizontal scanning length exceeding 8000 pixels can be handled, by connecting a plurality of units comprising the SIMD type processor and the FIFO memory as shown in Fig. 6. iDT that is the input data of 32 bits is input to the FIFO memory IN_FIFO, and output to the SIMD type processor as
25 iSIMD.

The data processed in the SIMD type processor is input to the FIFO memory OUT_FIFO as oSIMD and output as from OUT_FIFO as the output data oDT. IN_FIFO and OUT_FIFO are prepared for the number of SIMD type processors.

5 The SIMD type processor of the present invention has a detachable construction depending on the use mode. This is for enabling improvement in the processing speed of the entire image processing apparatus, by replacing the portion of the SIMD type processor, when the processing capability
10 of the SIMD type processor is improved.

 The improvement in the processing capability of the SIMD type processor becomes possible generally by improving the processing clock rate. Therefore, the processing clock rate of IN_FIFO or processing clock rate of OUT_FIFO is
15 different from that of the SIMD type processor, and the SIMD type processor is generally faster.

 The write clock rate (write speed) to IN_FIFO, iWCLK and the read clock rate (read speed) from OUT_FIFO, oRCLK are connected with a pixel clock sysclk (50 MHz) having the
20 same clock rate as that of iDT. On the other hand, the read clock rate of IN_FIFO, iRCLK and the write clock rate of OUT_FIFO, oWCLK are connected with a pixel clock rate proclk (55 MHz) that is the processing clock rate of the SIMD type processor.

25 As for write enable signals, write reset signals, read

enable signals and read reset signals of a plurality of
IN_FIFO and OUT_FIFO, signals corresponding to each
operation mode are generated in the control section 507 (see
Fig. 3). Here, the memory connected to the SIMD type
5 processor is the FIFO memory, but an image processing
processor may be constructed by 2-port RAM or the like.

The processing flow of IN_FIFO, SIMD type processor
and OUT_FIFO will now be described with reference to a timing
chart. Fig. 7 is a timing chart which shows the sequence
10 of processing performed by IN_FIFO, SIMD type processor and
OUT_FIFO.

Here, a description is given of an image processing
apparatus which processes 15900 pixels by using two SIMD type
processors capable of handling 8128 pixels. The basic idea
15 is to increase the processible pixel length by dividing the
image data, 15900 pixels, for one line in the horizontal
scanning direction which is read by, for example, the read
unit 201 (see Fig. 2) into two, to be processed by two SIMD
type processors. In the case of a normal parallel processing,
20 that is, when a certain image processing is performed without
referring to other pixels, the image data input from IDT is
simply divided and input to each IN_FIFO.

On the other hand, when a filtering processing such
as error diffusion processing is performed, that is, such
25 an algorithm is performed that the peripheral pixels are

referred to for performing calculation, portions overlapping to each other become necessary at a joint of areas under charge of two SIMD type processors, in order to accurately perform arithmetic execution for the joint
5 portion. Therefore, when the output of the arithmetic execution of 8000 pixels are required, in this example, 64 overlapping pixels are added to the front end and the rear end of the pixel to be processed. Hence, the write enable of IN_FIFO are generated for 8128 pixels.

10 The number of pixels (effective number of pixels) obtained by subtracting the number of peripheral pixels referred to for the target pixel from the number of pixels that can be image processed collectively by the SIMD type processor may be multiples of the number of rows or number
15 of columns of the dither matrix. It is because since the joint of each effective pixel coincides with the change in the dither matrix, the dither processing operation can be smoothly performed, and the processing program can be simplified.

20 As described above, the clock rate at the time when the data is read from the IN_FIFO and handed over to the SIMD type processor so as to correspond to the processing speed of the SIMD type processor, is a clock rate faster than that of when IN_FIFO inputs iDT. In this example, write to the
25 IN_FIFO is performed at 50 MHz, and readout from OUT_FIFO

is performed at 55 MHz.

The data handed over to the SIMD type processor is divided by 8128 pixel unit and transmitted. The SIMD type processor reads the data by SIMD_WE1, SIMD_WE2 which are
5 write enable of the processor. After a predetermined operation (image processing) is performed in the SIMD type processor, readout is performed by SIMD_RE1, SIMD_RE2 which are read enable of the processor.

The data oSIMD read out from the SIMD type processor
10 has 8128 pixels added with the overlapping portion (64 pixels $\times 2 = 128$ pixels) in addition to the effective pixels. Therefore, oWEN (write enable) is generated at a timing cutting off only 8000 pixels of the effective portions (portions not overlapped).

15 Write enable and write reset are generated so that two FIFOs are operated by a toggle. Readout is performed at the input pixel clock (pixel clock of iDT = 50 MHz), and oREN (read enable) is controlled so that the output data from each OUT_FIFO is connected to thereby obtain the final oDT.

20 As for the gate signal, a signal added with a delay in the gate signal in the SIMD type processor and the interface section thereof is generated as XoLSYNC, XoLGATE, with respect to the gate signal of the input data, XiLSYNC, XiLGATE. In the case of the timing of this FIFO memory, after
25 write of the input data to the FIFO memory has been completed,

read is performed. Therefore, the length of the FIFO memory is required to be equal to or longer than the number of pixels processed by the SIMD type processor (8128 pixels).

Outline of the processing in the image data control section 203 constituting the image data control unit 100 will now be described. Fig. 8 is a block diagram showing the outline of processing of the image data control section image data control section 203 in the image processing apparatus according to this embodiment.

As shown in Fig. 8, the image data input/output section 701 inputs (receives) the image data from the sensor board unit 202, and outputs (transmits) the image data to the image processing processor 204. That is to say, the image data input/output section 701 is a component for connecting the image read unit 101 and the image processing unit 103 (image processing processor 204), and it can be said that the image data input/output section 701 is a dedicated input/output section only for transmitting the image data read by the image read unit 101 to the image processing unit 103.

The image data input control section 702 inputs (receives) the image data having subjected to the scanner image correction in the image processing processor 204. The input image data is subjected to the data compression processing in the data compression section 703 for increasing the transfer efficiency in the parallel bus 220.

Thereafter, the image data is transmitted to the parallel bus 220 via the parallel data I/F 705, through the data conversion section 704.

The image data input via the parallel data I/F 705 from the parallel bus 220 is transmitted to the data expansion section 706 through the data conversion section 704, since it is compressed for bus transfer, and then is subjected to the data expansion processing. The expanded image data is transferred to the image processing processor 204 in the image data output control section 707.

The image data control section 203 also comprises a conversion function between the parallel data and the serial data. The system controller 231 transfers data to the parallel bus 220, and the process controller 211 transfers data to the serial bus 210. The image data control section 203 performs data conversion for the communication between two controllers.

The serial data I/F comprises a first serial data I/F 707 for exchanging data with the process controller via the serial bus 210, and a second serial data I/F 708 used for exchange of data with the image processing processor 204. By having one system independently between the serial data I/F and the image processing processor 204, the interface with the image processing processor 204 can be made smooth.

The command control section 709 controls the operation

of each component in the above-described image data control section 203 and each interface according to the input command.

Outline of the processing in the video data control section 205 constituting a part of the image write unit 104 will now be described. Fig. 9 is a block diagram showing the outline of processing of video data of the image processing apparatus according to the first embodiment.

As shown in Fig. 9, the video data control section 205 performs additional processing depending on the characteristic of the imaging unit 206, with respect to the input image data. That is to say, an edge smoothing processing section 801 performs dot rearrangement processing by means of an edge smoothing processing, and a pulse control section 802 performs pulse control of the image signal for forming dots, and the image data having subjected to the above processing is output to the imaging unit 206.

Independently of the conversion of image data, the video data control section 205 has a format conversion function of parallel data and serial data, so that even a single unit of the video data control section 205 can correspond to communication between the system controller 231 and the process controller 211. That is to say, the video data control section 205 comprises a parallel data I/F 803 for transferring parallel data, a serial data I/F 804 for

transferring serial data, and a data conversion section 805 for converting data received by the parallel data I/F 803 and the serial data I/F 804 to each other, to thereby convert the format of the both data.

5 Outline of the processing in the image memory access control section 221 constituting a part of the image memory control unit 102 will now be described. Fig. 10 is a block diagram showing the outline of processing of the image memory access control section 221 in the image processing apparatus
10 according to this embodiment.

As shown in Fig. 10, the image memory access control section 221 manages the interface of the image data with the parallel bus 220, controls the access of the image data to the memory module 222, that is, storage (write)/readout, and
15 control the development of code data input mainly from external PCs to the image data.

Therefore, the image memory access control section 221 has a construction comprising a parallel data I/F 901, a system controller I/F 902, a memory access control section
20 903, a line buffer 904, a video control section 905, a data compression section 906, a data expansion section 907, and a data conversion section 908.

Here, the parallel data I/F 901 manages the interface of the image data with the parallel bus 220. The memory
25 access control section 903 controls the access of the image

data to the memory module 222, that is, storage (write)/readout.

The input code data is stored in the local area by the line buffer 904. The code data stored in the line buffer 904 is developed to the image data in the video control section 905, based on the development processing command input from the system controller 231 via the system controller I/F 902.

The developed image data or the image data input from the parallel bus 220 via the parallel data I/F 901 is stored in the memory module 222. In this case, the image data to be stored is selected in the data conversion section 908, and subjected to data compression to increase the efficiency of memory use in the data compression section 906, and the image data is stored (written) in the memory module 222, while the addresses in the memory module 222 are controlled in the memory access control section 903.

As for readout of the image data stored (accumulated) in the memory module 222, the address to be read is controlled in the memory access control section 903, and the read image data is expanded in the data expansion section 907. When the expanded image data is transferred to the parallel bus 220, data transfer is performed via the parallel data I/F 901.

Contents of the image processing in the image

processing apparatus according to this embodiment will now be described. Fig. 11 is a diagram showing the outline of a scanner (an example of a spatial filter) in the image processing apparatus according to this embodiment. MTF
5 correction function is realized by a construction of the special filter.

As shown in Fig. 11, when the two-dimensional special filter is constructed including filter coefficients of from A to Y, filtering processing is performed with respect to
10 the input image data with the same arithmetic execution processing to all images. For example, when the special filtering processing is performed centering on the input image data (i row, j column), the operation processing with the corresponding coefficient is performed with respect to
15 the image in the i row, j column, respectively. The pixel in (i, j) is subjected to the arithmetic execution with the coefficient value M , and the pixel in ($i, j+1$) is subjected to the arithmetic execution with the coefficient value N . The calculation result in the filter matrix is output as the
20 processing result of the target pixel (i, j).

When the target pixel is ($i, j+1$), the pixel in ($i, j+1$) is subjected to the arithmetic execution with the coefficient value M , and the pixel in ($i, j+2$) is subjected to the arithmetic execution with the coefficient value N ,
25 and the calculation result in the filter matrix is output

as the processing result of the target pixel (i, j+1).

The processing is such that the input image data is different, and the parameter for processing is common. In this spatial filtering processing, the value of coefficient values A to Y is not fixed, and may be optionally changed depending on the characteristic of the input image, and desired image quality. Otherwise, the flexibility of the image processing function may not be ensured.

Execution by the image processing processor 204 is performed by downloading the coefficient value by the process controller, and can correspond to changes in the system by changing the contents of the data to be loaded, even if the construction of the read unit is changed and the characteristic in read image deterioration is changed. The parallel processing of the image processing processor 204 will be described in detail.

Fig. 12 is a diagram showing the outline of shading correction of the image processing apparatus according to this embodiment. Fig. 13 is a diagram showing the outline of shading data in the image processing apparatus according to this embodiment. The shading correction is for correcting the nonuniformity of the reflected light characteristic based on the illuminance distribution of an illumination system, wherein a reference white board having uniform concentration is read before readout of the document,

to form reference data for shading correction, and based on the shading data, normalization of reflection distribution depending on the read position of the read image is performed.

As shown in Fig. 13, the shading data has different reflection distribution depending on the document read position n. At the end portion of the document read position, the white board having uniform concentration is read dark. Sn shows a white board read signal level at the read position n, and it shows that as the Sn becoming large, brighter is the white board read.

The shading correction is to correct the light quantity distribution nonuniformity of the lamp by executing the processing of the same content to the respective read image data, with respect to the data depending on the position. The S data shown in Fig. 12 is the shading data formed by the white board read shown in Fig. 13. The D data shown in Fig. 12 is the read data of each read line. Also, n shows the read position.

C data is data after the D data has been subjected to the shading correction, and normalized as:

$$C_n = A \times (D_n/S_n)$$

where A is a normalization coefficient.

In the image processing processor 204, S data is stored in the local memory, and correction operation is performed between corresponding Dn and Sn with respect to the input

D data.

Fig. 14 is a diagram showing the schematic construction of a SIMD type processor. SIMD (Single Instruction stream Multiple Data stream) is for executing a single command in parallel with respect to a plurality of data, and comprises a plurality of PE (processor element). This SIMD type processor is provided in a prescribed location in the processor array section 604 in Fig. 4 or Fig. 5.

Each PE comprises a register (Reg) 2001 for storing data, a multiplexer (MUX) 2002 for accessing other PE registers, a barrel shifter (Shift Expand) 2003, an arithmetic logic unit (ALU) 2004, an accumulator (A) 2005 for storing the logic result, and a temporary register (F) 2006 for temporarily putting aside the contents of the accumulator.

Each register 2001 is connected to the address bus and data bus (lead and word line), for storing command codes for prescribing the processing and data to be processed. The contents of the register 2001 are input to the arithmetic logic unit 2004 and the operation processing results are stored in the accumulator 2005. In order to take out the results to the outside of PE, the results are temporarily put aside in the temporary register 2006. By taking out the contents of the temporary register 2006, the processing result with respect to the data to be processed can be

obtained.

The command codes having the same content are given to each PE, and data to be processed is given to each PE in a different condition. The operation results are processed
5 in parallel and output to each accumulator 2005, by referring to the contents in the register 2001 of the neighboring PE in the multiplexer 2002.

For example, if the contents in one line of the image data are arranged in PE for each pixel, and are subjected
10 to the arithmetic execution processing with the same command code, the processing result for one line can be obtained in a shorter period of time than in the case where sequential processing is performed for one pixel. In particular, with the spatial filtering processing and shading correction
15 processing, processing can be performed commonly to all PEs, with the command code to each PE being arithmetic expression itself.

As described above, the image processing apparatus according to this embodiment uses a plurality of operation
20 processors having a general-purpose memory of a fixed length connected for performing, for example, processing of pixels in one line in the horizontal scanning direction. Hence, by performing image processing in a system which realizes multi-functions, high-speed image processing can be
25 performed, wherein the development efficiency is improved.

Moreover, since the FIFO memory is provided and controlled so as to become read enable and write enable at an appropriate timing, even if image processing referring to other pixels is performed, high-speed parallel processing can be contemplated, by processing overlapping pixels having a certain length.

Moreover, even if the processing clock rate of the SIMD type processor is different from that of the FIFO memory, image processing is possible, and high-speed processing can be contemplated. Effective utilization of respective resources related to the image processing of the system which realizes multi-functions can be contemplated, thereby enabling high-speed image processing wherein the development efficiency is improved.

In the above-described first embodiment, the input/output FIFO memory requires a value larger than the number of pixels to be processed in the SIMD type processor. However, in the second embodiment described below is a case wherein high-speed image processing is realized, even if the FIFO memory has a capacity smaller than the number of pixels to be processed in the SIMD type processor. In the second embodiment, description of the parts common to the first embodiment is omitted, and only parts different from those in the first embodiment are described. Also in the drawing, the parts similar to those in the first embodiment are denoted

by the same reference symbols.

Fig. 15 is a timing chart showing the processing flow in the image processing processor of an image processing apparatus in the second embodiment. In this second
5 embodiment, the point that the input data iDT is processed for every 15900 pixels, being a unit in the horizontal scanning direction, and written in IN_FIFO for 8128 pixels at a clock rate of 50 MHz including the overlapped portion is the same as in the case of the first embodiment.

10 Readout is performed after all the data is written in the FIFO memory in the first embodiment. However, in the second embodiment, readout is started before write is completed. The clock rate of the written data is 50 MHz, and the clock rate of readout is 55 MHz.

15 Therefore, the read speed is faster than the write speed, but if it is assumed that the FIFO memory has a capacity for holding 813 pixels ($8128 \times 5/50 = 812.8$), the readout address does not get ahead of the write address, by performing control for starting the readout after data more than 813
20 pixels have been accumulated (have been written).

That is, even if the FIFO memory has a capacity smaller than the capacity that can be batch-processed by the SIMD type processor, the whole image processing processor does not have to be modified by performing timing control of read
25 and write of the FIFO memory.

Moreover, in general, since the FIFO memory performs constant buffering, a certain time lag occurs in the later processing operation. Therefore, as the capacity of the FIFO memory becomes smaller, higher processing speed can be obtained. Accordingly, as in the present invention, with the improvement in the processing speed of the SIMD type processor, even if the FIFO memory has relatively insufficient capacity, the more is improved in the whole processing speed. Alternatively, by making the FIFO memory small intentionally, and making the SIMD type processor high speed, it is possible to contemplate improvement in the processing speed synergistically.

The data input/output of the OUT_FIFO on the output side is opposite to the input side, and data input to the OUT_FIFO is performed at 55 MHz, and data output is performed at 50 MHz. Accordingly, the readout address does not get ahead of the write address

However, since the read speed is slower, it is necessary to accumulate data before being read in the FIFO memory. As described above, if 8128 pixels are handled, OUT_FIFO requires a length that can accumulate data of 813 pixels or more. The delay in the input with respect to the gate signal is effected by a desired amount in the gate delay block as described in claim 1.

The image processing apparatus in the second

embodiment can perform high-speed image processing as a whole, in such a manner that even if the processing speed of the SIMD type processor is higher than the write speed to the IN_FIFO and read speed from OUT_FIFO, the SIMD type
5 processor can sufficiently exert high-speed processing capability, by controlling a predetermined write timing or read timing, and the FIFO memory can reduce occurrence of time lag by decreasing the capacity thereof.

A third embodiment provides an image processing
10 apparatus that can cover longer horizontal scanning direction with smaller number of SIMD type processors. Again, description of parts common to those in the first or second embodiments is omitted, and only parts different from those in the first or second embodiments is described. Also
15 in the drawing, the parts similar to those in the first or second embodiment are denoted by the same reference symbols.

Fig. 16 is a timing chart showing the processing operation of an image processing processor which performs batch processing of images up to 31800 pixels by using two
20 SIMD type processors repeatedly twice. The basic timing of write enable and read enable is the same as in the second embodiment, and a timing is adopted that can interface with a FIFO memory having a capacity shorter than 8128 pixels, being the batch processing length of the SIMD type processor.

25 The two SIMD type processors are designated as SIMD

type processor 1 and SIMD type processor 2, respectively.
The SIMD type processor 1 processes data 1 of 8128 pixels
from the top. The processing of data 2 of the next 8128
pixels including an overlap of 64 pixels is performed by the
5 SIMD type processor 2.

When the data 1 of the next 8128 pixels comes in, the
SIMD type processor 1 has already completed processing,
hence the SIMD type processor 1 is reused for the processing
of data 1. Also, when the data 2 of the next 8128 pixels
10 comes in, the SIMD type processor 2 has already completed
processing, hence the SIMD type processor 2 is reused for
the processing of data 2.

In the third embodiment, it is possible to perform
image processing by using the SIMD type processors
15 repeatedly, without replacing the image processing
processor, even if the number of pixels increases, gathering
in the horizontal scanning direction which is required to
be batch-processed, in the read unit 201 or the like in Fig.
2, and becomes longer than the batch processing length of
20 the prepared SIMD type processor.

A fourth embodiment provides an image processing
apparatus wherein the overlap quantity at the time of
connecting images in the respective SIMD type processors
described in the first, second or third embodiments can be
25 changed.

Normally, the required minimum overlap quantity changes depending on the contents of processing performed in the SIMD type processor. For example, if a filter processing is required for 9 pixels which refers to 5 pixels on both sides of the target pixel, the overlap is required for at least 5 pixels. If this is for the algorithm in which wider range has to be referred to, such as image area separation, the overlap quantity has to be increased.

On the other hand, in order to ensure the overlap quantity with a margin, more pixels have to be processed for the margin, hence the processing clock rate becomes high more than necessary. This leads to increase of power consumption and cost up, since a measure against EMI (Electromagnetic Interference) should be performed more than necessary. As a result, such a control is desirable that the number of overlaps is increased when it is necessary at any cost.

Fig. 17 is a timing chart when the overlap pixels become 256 pixels. Since the number of overlap pixels increases, and 512 pixels are necessary on both sides, the number of pixels input/output to the FIFO memory becomes 8512 pixels. The data of this number of pixels is read from the FIFO memory at a speed of 60 MHz faster than before. In-between blocks of data are not overlapped and handed over to the SIMD type processor. It is necessary for the SIMD type processor to process 8512 pixels, and hence the SIMD type processor

receives data at a clock rate of 60 MHz, and performs internal processing.

The timing of the FIFO memory or the like which inputs or outputs at a clock rate of 60 MHz used herein is required to be changed depending on the number of pixels to be overlapped. If the overlap quantity is small, the number of pixels to be processed decreases, and hence the clock rate also decreases. On the contrary, if the overlap quantity is large, the clock rate increases.

The data whose processing is completed is output from the SIMD type processor at the same clock rate of 60 MHz, and 256 pixels of the overlap are cut off in the OUT_FIFO. Subsequently, effective data of 8000 pixels are connected and output at a clock rate of 50 MHz, to become oDT.

In the fourth embodiment, the clock rate of the SIMD type processor and the timing of each FIFO memory are changed depending on the processing contents, thereby enabling reduction of power consumption and radiation field.

As described above, according to the present invention, even if the memory capacity of the image processing unit (image processing processor) is relatively insufficient, the image processing processor can be effectively utilized. As a result, an image processing apparatus which can perform image processing at high-speed can be realized.

The present document incorporated by reference the

entire contents of Japanese priority document, 11-306014
filed in Japan on October 27, 1999.

Although the invention has been described with respect
to a specific embodiment for a complete and clear disclosure,
5 the appended claims are not to be thus limited but are to
be construed as embodying all modifications and alternative
constructions that may occur to one skilled in the art which
fairly fall within the basic teaching herein set forth.

WHAT IS CLAIMED IS:

1. An image processing apparatus which refers to peripheral pixels of a target pixel to perform processing of said target pixel, said image processing apparatus
5 comprising:

an input I/F memory which reads pixels having a predetermined length, subjects these pixels to buffering, and then writes these pixels in a SIMD type processor;

a SIMD type processor which performs batch processing
10 of the pixels written from said input I/F memory;

an output I/F memory which reads the pixels batch-processed by said SIMD type processor, subjects the pixels to buffering and writes the pixels in a predetermined output destination; and

15 a control unit which controls the read and/or write timing of said input I/F memory and said output I/F memory.

2. The image processing apparatus according to claim 1, wherein said control unit controls the write and/or read
20 timing to thereby use said input I/F memory and output I/F memory a plurality of times.

3. The image processing apparatus according to claim 1, wherein an effective number of pixels obtained by
25 subtracting the number of peripheral pixels referred to for

said target pixel from the number of pixels batch-processed by said SIMD type processor is multiples in a dither matrix.

4. The image processing apparatus according to claim 1,
5 wherein said SIMD type processor is physically detachable from said input I/F memory or said output I/F memory.

5. An image processing apparatus which refers to
peripheral pixels of a target pixel to perform processing
10 of said target pixel, said image processing apparatus comprising:

an input I/F memory which reads pixels having a
predetermined length, subjects these pixels to buffering,
and then writes these pixels in a SIMD type processor at a
15 speed faster than when the pixel were read;

a SIMD type processor which performs batch processing
of the pixels written from said input I/F memory;

an output I/F memory which reads the pixels batch-
processed by said SIMD type processor, subjects the pixels
20 to buffering and writes these in a predetermined output
destination at a speed slower than that of readout of said
batch-processed pixels; and

a control unit which controls the read and/or write
timing and read and/or write speed of said input I/F memory
25 and said output I/F memory.

6. The image processing apparatus according to claim 5, wherein said control unit controls the write and/or read timing to thereby use said input I/F memory and output I/F memory a plurality of times.

5

7. The image processing apparatus according to claim 5, wherein an effective number of pixels obtained by subtracting the number of peripheral pixels referred to for said target pixel from the number of pixels batch-processed by said SIMD type processor is multiples in a dither matrix.

8. The image processing apparatus according to claim 5, wherein said SIMD type processor is physically detachable from said input I/F memory or said output I/F memory.

15

9. An image processing apparatus which refers to peripheral pixels of a target pixel to perform processing of said target pixel, said image processing apparatus comprising:

20 an input I/F memory which reads pixels having a predetermined length, subjects these pixels to buffering, and then writes these pixels in a SIMD type processor at a speed faster than when the pixels were read, and which has a capacity smaller than pixels batch-processed by said SIMD
25 type processor;

a SIMD type processor which performs batch processing of the pixels written from said input I/F memory;

an output I/F memory which reads the pixels batch-processed by said SIMD type processor, subjects the pixels
5 to buffering and writes these in a predetermined output destination at a speed slower than when the batch-processed pixels were read, and which has a capacity smaller than pixels batch-processed by said SIMD type processor; and

a control unit which controls the write and/or read
10 speed with respect said input I/F memory, and the write and/or read timing with respect said input I/F memory based on said speed and the capacity of said input I/F memory, and/or the write and/or read speed with respect said output I/F memory, and the write and/or read timing with respect said output
15 I/F memory based on said speed and the capacity of said output I/F memory.

10. The image processing apparatus according to claim 9, wherein said control unit controls the write and/or read
20 timing to thereby use said input I/F memory and output I/F memory a plurality of times.

11. The image processing apparatus according to claim 9, wherein an effective number of pixels obtained by
25 subtracting the number of peripheral pixels referred to for


said target pixel from the number of pixels batch-processed
by said SIMD type processor is multiples in a dither matrix.

12. The image processing apparatus according to claim 9,
5 wherein said SIMD type processor is physically detachable
from said input I/F memory or said output I/F memory.

ABSTRACT OF THE DISCLOSURE

The image processing apparatus comprises an input I/F memory which reads pixels having a predetermined length, subjects the read pixels to buffering, and writes them in
5 a SIMD type processor. The SIMD type processor performs batch processing of the pixels. Further, an output I/F memory reads the pixels batch-processed by the SIMD type processor, subjects the read pixels to buffering and writes them in a predetermined output destination. Read and/or
10 write timing of IN_FIFO and OUT_FIFO is appropriately controlled.

FIG. 1

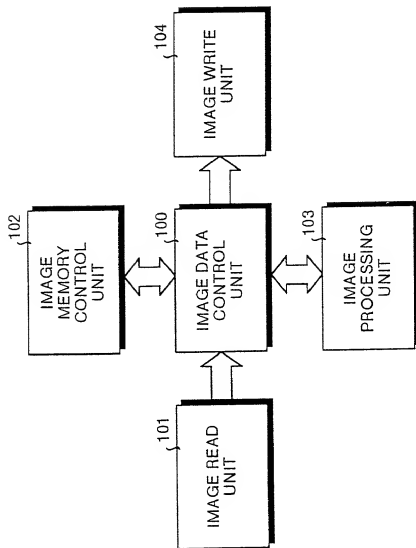

2/17

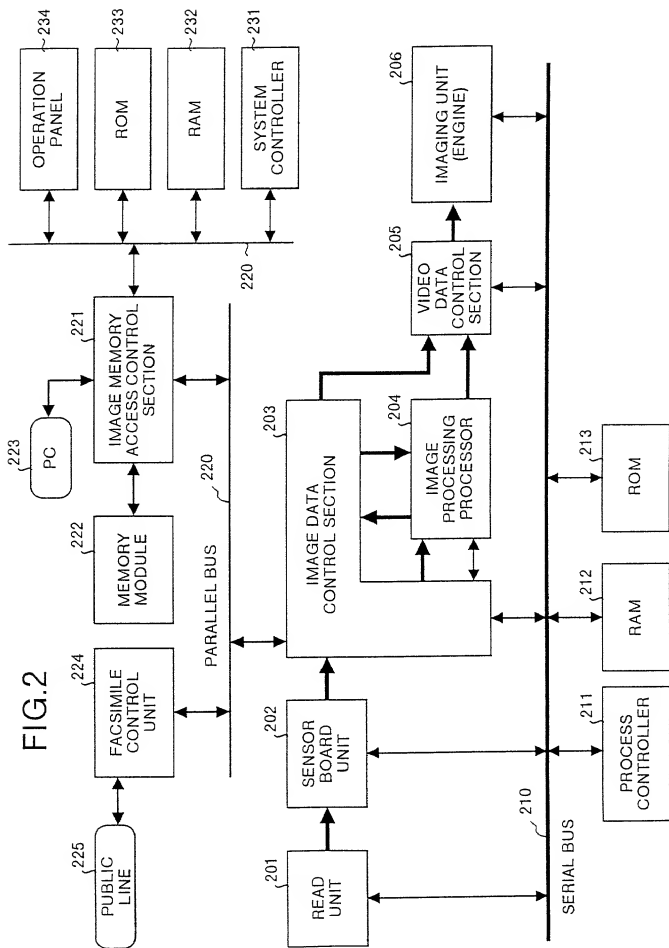


FIG.3

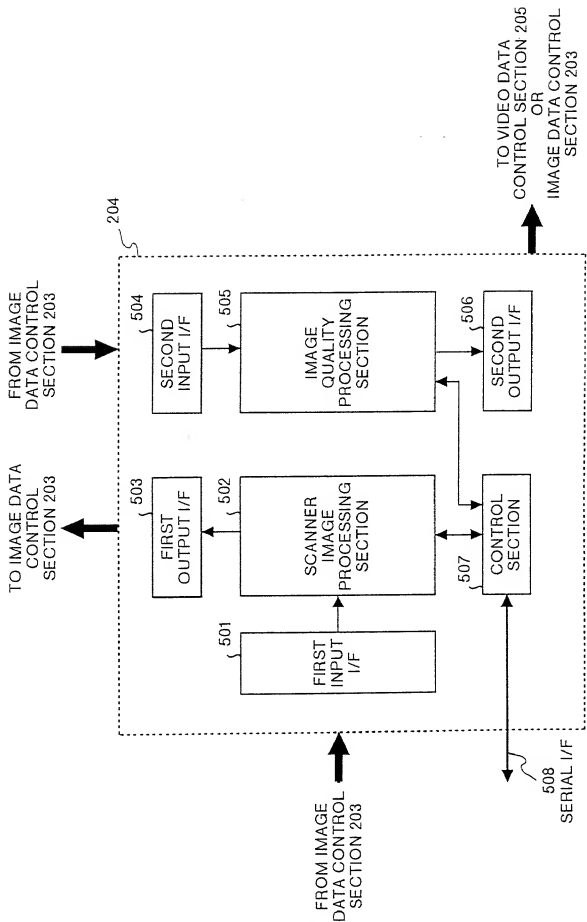


FIG. 4

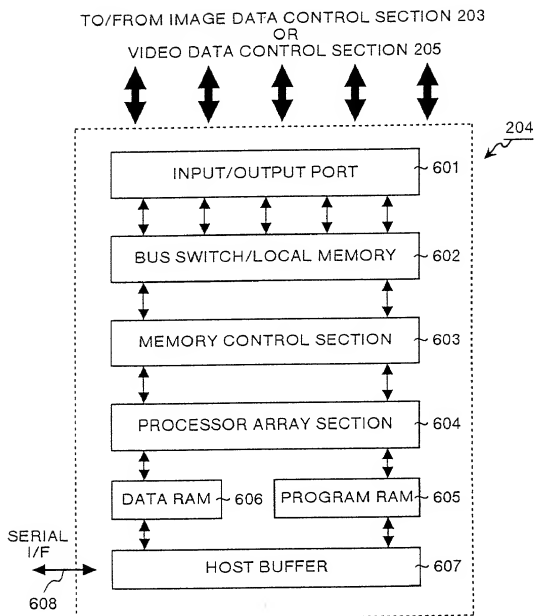
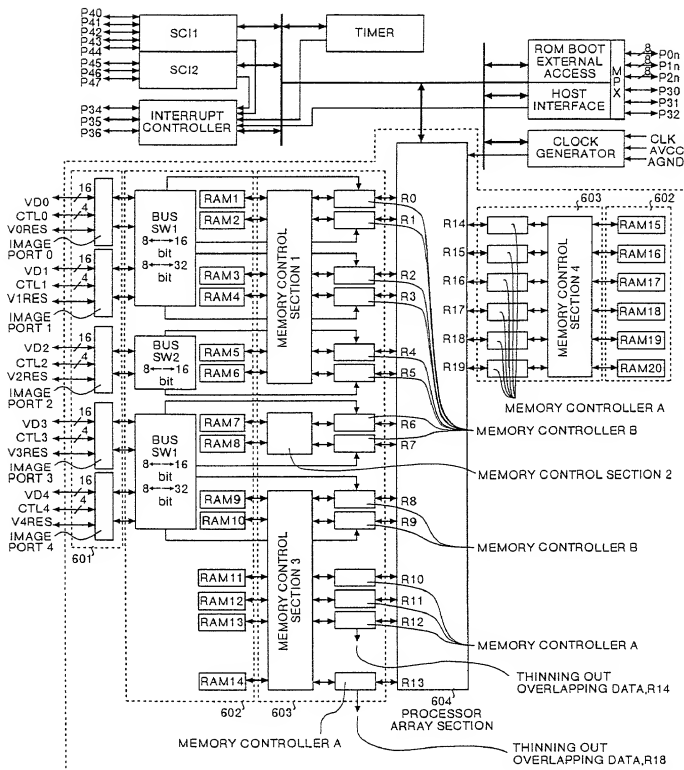


FIG.5



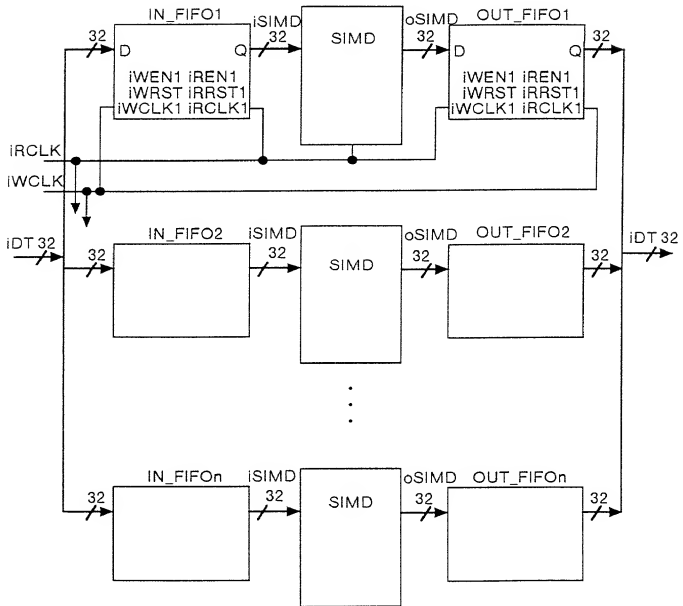


FIG. 7



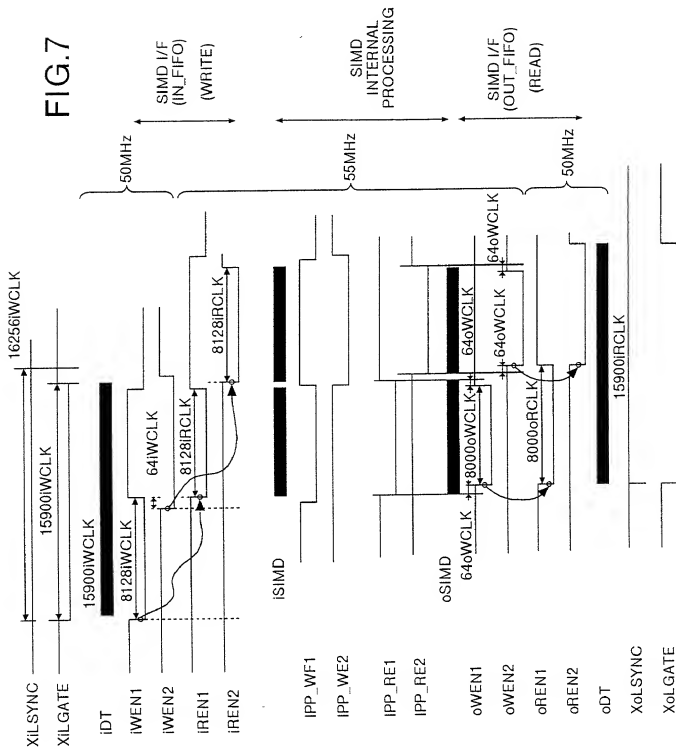


FIG. 8

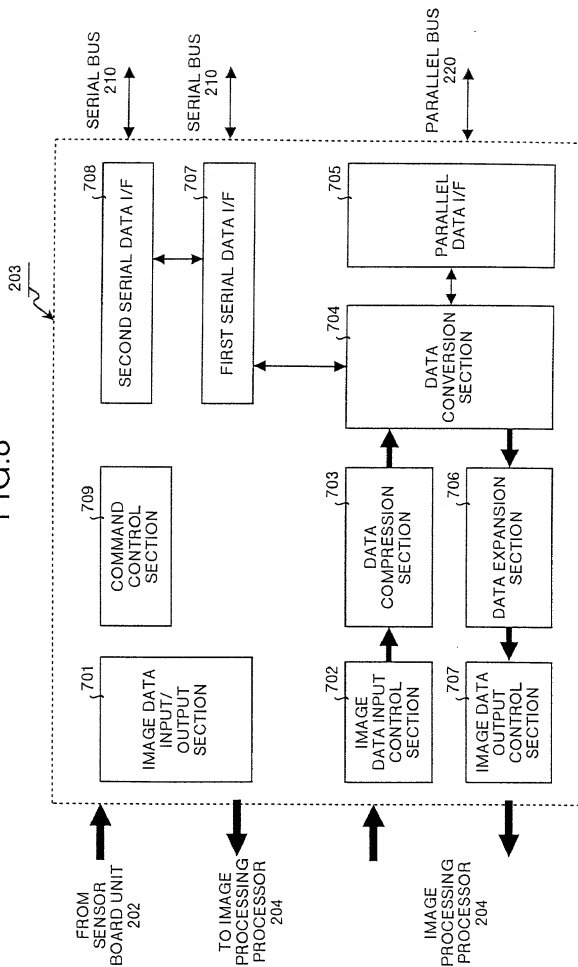


9/17

FIG. 9

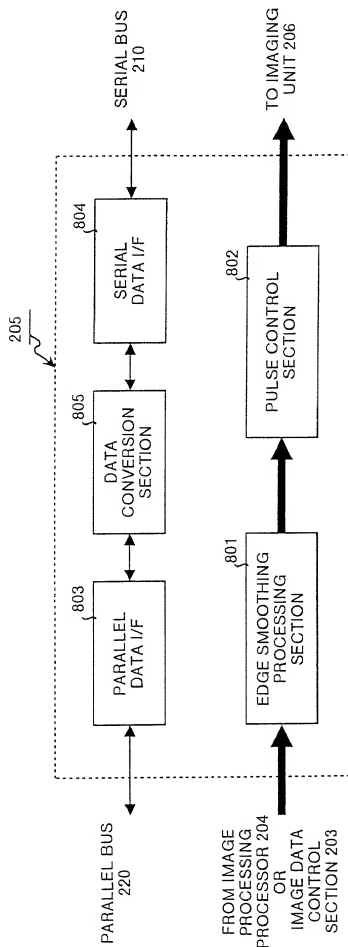

10/17

FIG. 10

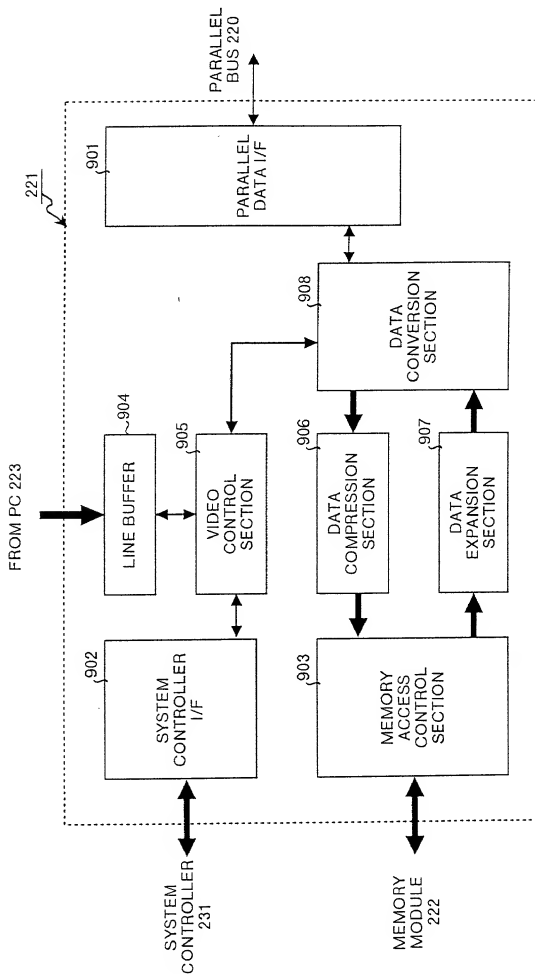

11/17

FIG.11

		COLUMN				
		j-2	j-1	j	j+1	j+2
ROW	i-2	A	B	C	D	E
	i-1	F	G	H	I	J
	i	K	L	M	N	O
	i+1	P	Q	R	S	T
	i+2	U	V	W	X	Y

FIG.12

S DATA								Sn					
D DATA								Dn					
O DATA								Cn					

12/17

FIG.13

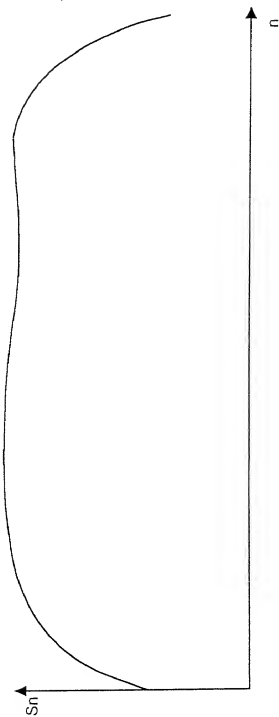


FIG. 14

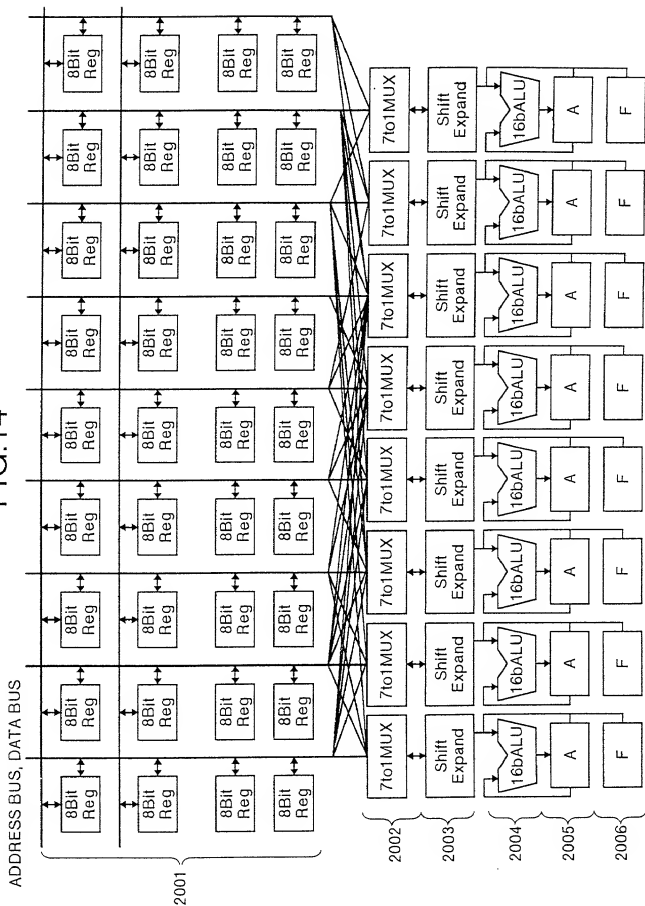


FIG.15

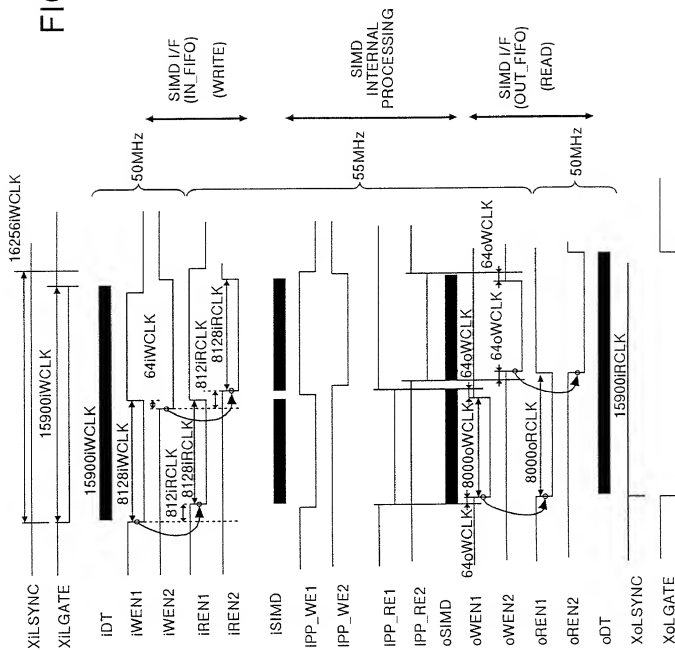


FIG.16

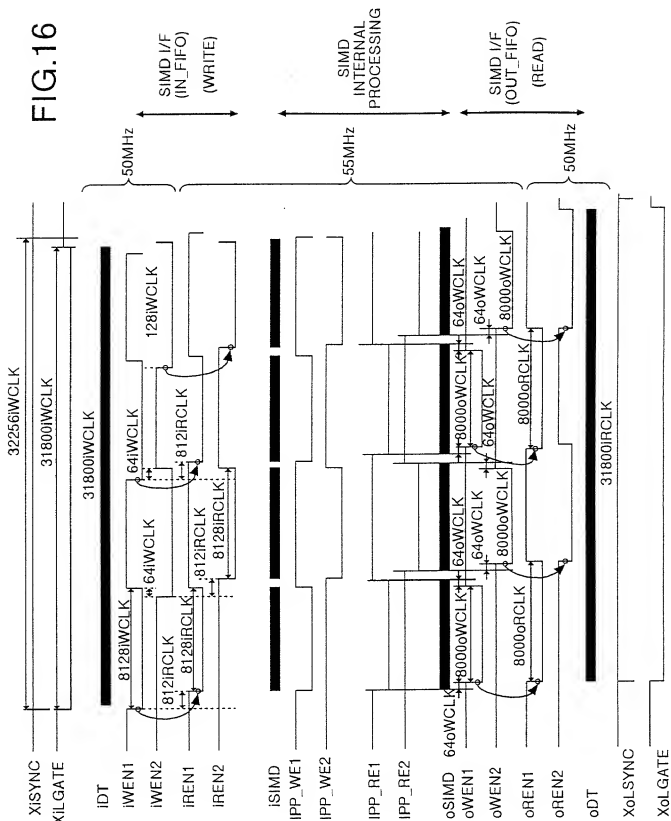


FIG.17


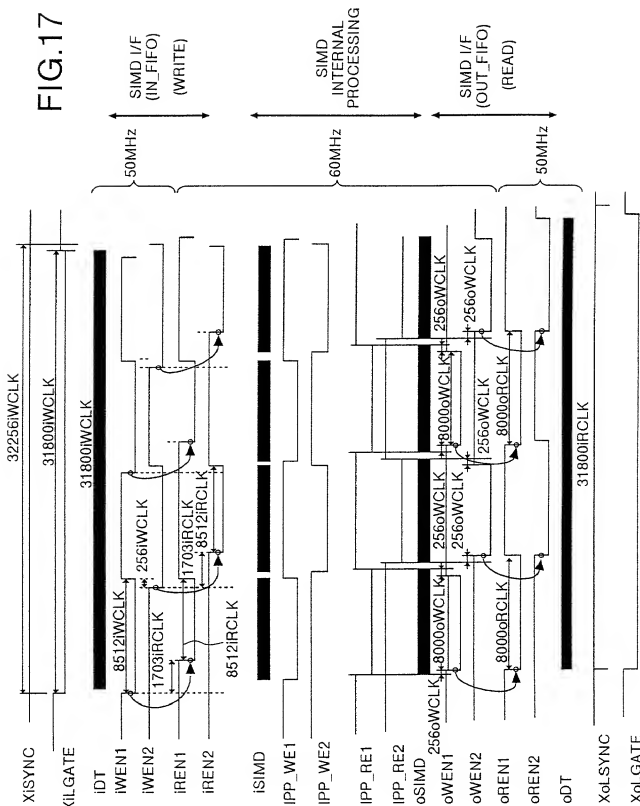


FIG. 18

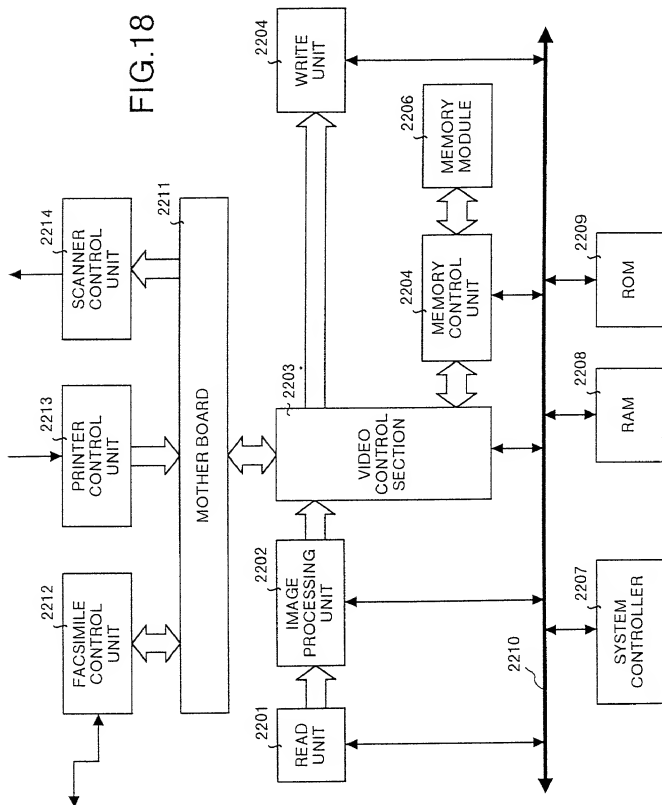

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF: Hiroyuki KAWAMOTO, et al.

FILING DATE: Herewith

FOR: IMAGE PROCESSING APPARATUS

LIST OF INVENTORS' NAMES AND ADDRESSES

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Listed below are the names and addresses of the inventors for the above-identified patent application.

Hiroyuki KAWAMOTO	Tokyo, JAPAN
Yasuyuki NOMIZU	Tokyo, JAPAN
Yoshiyuki NAMIZUKA	Tokyo, JAPAN
Hideto MIYAZAKI	Tokyo, JAPAN
Shinya MIYAZAKI	Tokyo, JAPAN
Yuji TAKAHASHI	Tokyo, JAPAN
Takako SATOH	Tokyo, JAPAN
Takeharu TONE	Tokyo, JAPAN
Fumio YOSHIKAWA	Tokyo, JAPAN
Hiroaki FUKUDA	Tokyo, JAPAN
Rie ISHII	Tokyo, JAPAN
Sugitaka OTEKI	Tokyo, JAPAN

A declaration containing all the necessary information will be submitted at a later date.




22850

Tel. (703) 413-3000
Fax. (703) 413-2220
(OSMMN 11/98)

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.


Marvin J. Spivak

Registration No. 24,913

C. Irvin McClelland
Registration Number 21,124